
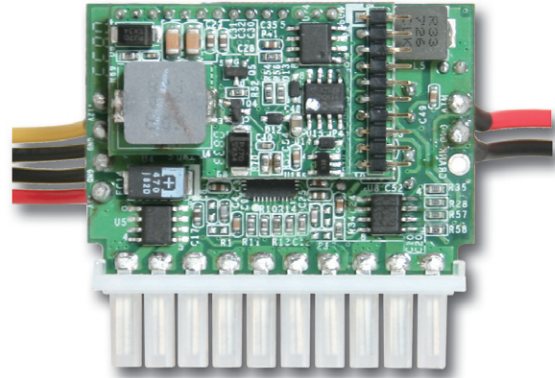


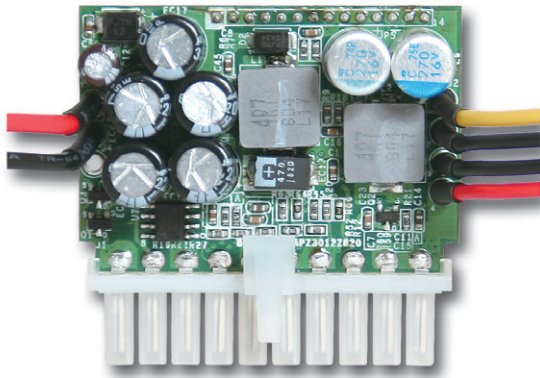

FEATURES

- 9~29V/Wide-input, plug into the ATX connector with socket output
- Compact and user-friendly design for installation and maintenance
- Fan-less design for mission-critical application
- Small size to save space

SPECIFICATION

Input Voltage	9V~29V, 6~9V workable with derating
Line Regulation	9V~29V/input
Max Output	96Watts
Efficiency	>85% @ 12V
Input Connector	Mini-Fit 2 pin (P/N: B6902310)
Output Connector	Mini-Fit 4 pin (P/N: B6902330)
Dimension (WxDxH)	48 x 23.5 x 45 mm

CHARACTERISTICS

Output Voltage	Load Regulation	Cross Regulation
+12V	0~6A	6A
+5V	0~6A	4A
+3.3V	0~6A	6A
+5Vsb	0~6A (Share with +5V)	2A
-12V	0~0.05A	0.05A

ORDERING GUIDE

- **GADIWA-3120**
96W DC/DC 9V~29V/input, ATX/output, Socket Type Converter

Installation Image

